


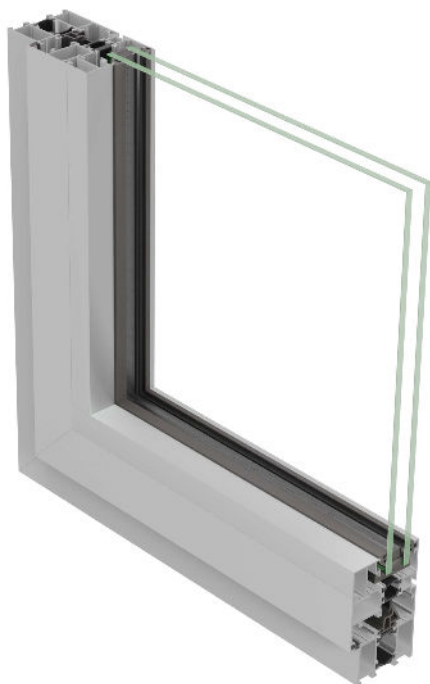

PARALU 56 FT is a high performance and thermal casement windows and doors series; suitable for all kind of inward and outward openings with low U-value that prevents temperature exchange between exterior and interior.

MAIN ADVANTAGES




- Side hinged Windows & Doors
- Outside Projecting Windows.
- Bottom Hinged Windows.
- Tilt & Turn Windows & Doors.
- Folding Doors.
- Tilt & Slide Windows.

DIMENSIONS AND WEIGHTS

		PARALU 56 FT		
		Small windows	Big windows	Doors
Width Per Leaf	Min	400mm	800mm	900mm
	Max	800mm	1000mm	1200mm
Height Per Leaf	Min	400mm	1200mm	1800mm
	Max	1200mm	2000mm	2600mm
Weight Per Leaf	Min	60kg	90kg	100kg
	Max	75kg	100kg	160kg

PERFORMANCE

Acoustical Performace	Rw = 48 DB
Air Permeability	(EN 12207) : Classe A*4
Burglary	WK2 (Dutch & European standard NEN 5096 & ENV1627)
Thermal Performance	RW(C;Ctr) ≤ 48 (-1;-3)dB depending on type of glass
Water Permeability	(EN 12208) : Classe E*6B
Wind Resistance	(EN 12210) : Classe V*B3

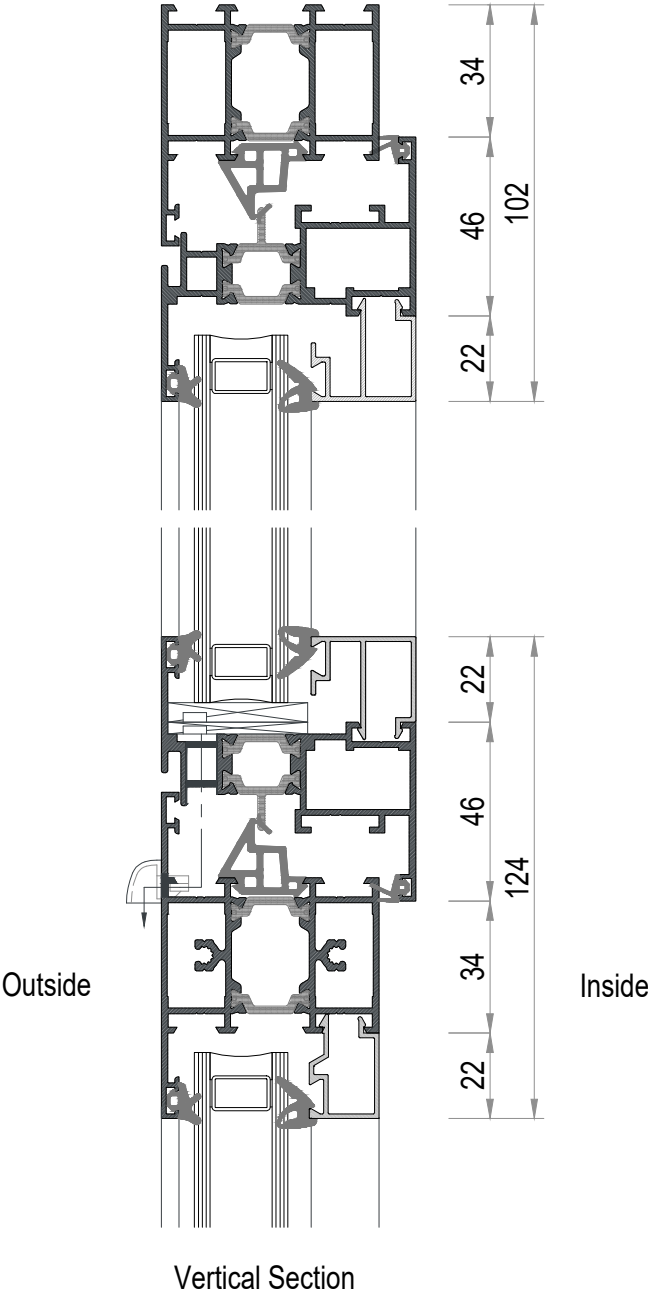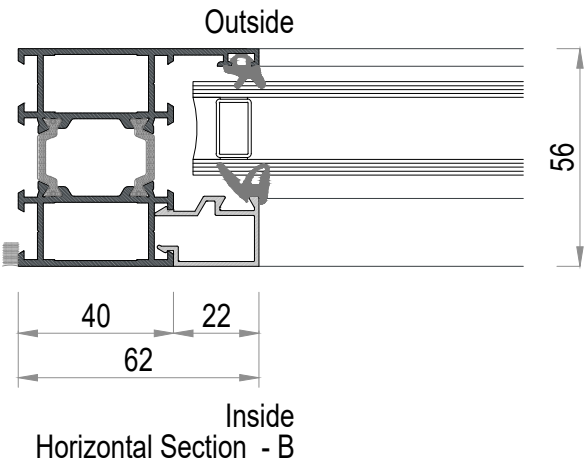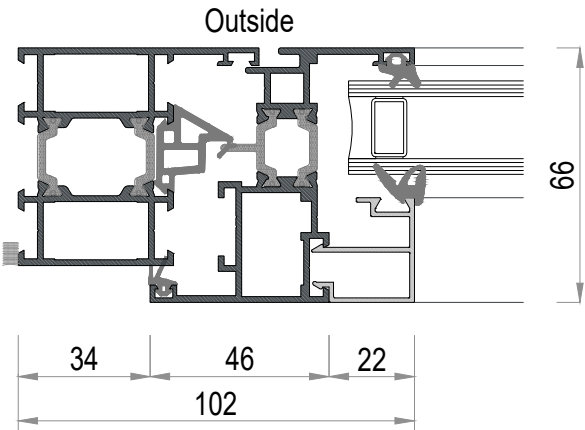

ARCHITECTURAL ASPECT

PARALU 56 FT		
Visible Height	Frame	62mm
	Leaf	102mm
	Central Upright	124mm
Visible Width	Frame	56mm
	Leaf	66mm
Glass Thickness		24 to 43mm